


UHF RFID TYRE PATCH (XLARGE)

IDT TPXL

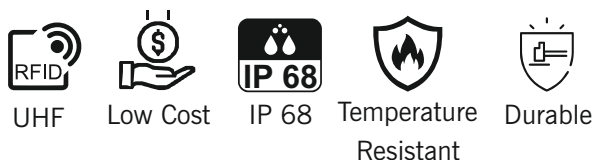

The RFID Tyre Patch Tag (IDT TPXL) is a versatile and durable RFID tag designed for tire patches. With a wide operating temperature range (-40°C to +85°C), resistance to chemicals and moisture, and IP68 sealing, it ensures reliable performance in various environments. Compatible with multiple chip types and offering a read range of up to 6m, the IDT TPXL enables efficient tire tracking and management.

PHYSICAL PARAMETERS

Dimension	157mm x 109mm x 5mm (Custom Size Available)
Weight	38g $\pm$ 2
Encasement / Material	Vulcanised Rubber
Packaging	Premium Plastic Packing

ENVIRONMENTAL SPECIFICATION

Operating Temperature	-40°C to +85°C
Storage Temperature	-40°C to +85°C
Chemical Resistance	Resistant To Chemical Solvent and Moisture
Shock & Vibration	MIL STD 810-G
Attachment	Adhesive Backing For Easy Mounting
Sealing	IP 68

RFID PERFORMANCE

Working Frequency	865 – 868 MHz (ETSI) / 902 – 928 MHz (FCC)
Standard Protocol	EPC Class 1 Gen 2v2, ISO 18000-6C
Chip Type	Alien Higgs-9, Impinj M700/800 Series, UCODE 9 chip
EPC Memory	Chip Dependent
TID Memory	Chip Dependent
Read Range Fixed Reader	Up to 6m (Reader & Chip Dependent)
Read Range Handheld Reader	Up to 2m (Reader & Chip Dependent)

PERSONALIZATION

Pre-Encoding	Customer Specific Encoding of EPC
Customized Printed	Customer Specific Layout Including Logo, Text, Numbers, Barcode, etc.

ORDER INFORMATION

Part No.	IDT.RF.T.TPXL.BL (Blank)
----------	--------------------------

APPLICATION AREA



Inventory



Automotive



Warehouse



Industrial Applications



ID TECH SOLUTIONS PVT. LTD.

610, Udyog Vihar Phase-5, Gurgaon, Haryana - 122016, INDIA | T. : +91-124 - 4255530 (6 Lines)
E.: info@idsolutionsindia.com | W: www.idsolutionsindia.com



.eciton tuotiw emityna egnahc ot tcejbus era teehs noitacfiiceps eht ni detsil snoitpircsed dna snoitacfiiceps tcudorp eht
©2025 ID Tech Solutions Pvt. Ltd. All Rights Reserved.